

FORM PTO-1390
(REV 10-94)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

10921.99USWO

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.55)
UNKNOWN 09/890758

INTERNATIONAL APPLICATION NO

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/00578

FEBRUARY 2, 2000

FEBRUARY 12, 1999

TITLE OF INVENTION

IMAGE SENSOR AND TRANSPARENT COVER FOR THE SAME

APPLICANT(S) FOR DO/EO/US


ONISHI, HIROAKI; FUJIMOTO, HISAYOSHI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98, form 1449, 3 references.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: PCT/IB/304, PCT/IB/308, PCT/IB/332, PCT/ISA/210, PCT/IPEA/409, Preliminary Amendment, Amended Claims under PCT Article 34, Front Page of PCT/JP00/00578, Certification of Translation of the same

U.S. APPLICATION NO (If known, see 37 C.F.R. 1.5) UNKNOWN 09/890758		INTERNATIONAL APPLICATION NO PCT/JP00/00578		ATTORNEY'S DOCKET NUMBER 10921.99USWO	
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a) (1)-(5)): Search Report has been prepared by the EPO or JPO.....\$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.492(a)(1)).....\$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))\$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(3)) paid to USPTO \$1000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	15 -20 = 0		X \$18.00	\$0	
Independent claims	4 -3 = 1		X \$80.00	\$80.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$0	
TOTAL OF ABOVE CALCULATIONS =				\$940.00	
Reduction by 1/2 for filing by small entity, if applicable. Small entity status is claimed pursuant to 37 CFR 1.27				\$0	
SUBTOTAL =				\$940.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+ \$0	
TOTAL NATIONAL FEE =				\$940.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+ \$40.00	
TOTAL FEES ENCLOSED =				\$980.00	
				Amount to be:	
				refunded	\$0
				charged	\$0
a. <input checked="" type="checkbox"/> Check(s) in the amount of \$940.00 and \$ 40.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>13-2725</u> .					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO Douglas P. Mueller MERCHANT & GOULD P.O. Box 2903 Minneapolis, MN 55402-0903			SIGNATURE:  NAME: Douglas P. Mueller REGISTRATION NUMBER: 30,300		

S/N unknown

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Onishi, et al.	Docket No.:	10921.99USWO
Serial No.:	unknown	Filed:	concurrent herewith
Int'l Appln No.:	PCT/JP00/00578	Int'l Filing Date:	February 2, 2000
Title:	IMAGE SENSOR AND TRANSPARENT COVER FOR THE SAME		

CERTIFICATE UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL658338650US

Date of Deposit: August 2, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Commissioner for Patents, Washington, D.C. 20231

By

Name: Omesh Singh

PRELIMINARY AMENDMENT

Box PCT
Assistant Commissioner for Patents
Washington, D. C. 20231

Dear Sir:

In connection with the above-identified application filed herewith, please enter the following preliminary amendment, which is based on the Article 34 amendments, based on claims amended in prosecution of the international application and published in the International Preliminary Examination Report, a copy of which is enclosed herewith:

IN THE ABSTRACT

Insert the attached Abstract page into the application as the last page thereof.

IN THE SPECIFICATION

A courtesy copy of the present specification is enclosed herewith. However, the World Intellectual Property Office (WIPO) copy should be relied upon if it is already in the U.S. Patent Office.

REMARKS

A new abstract page is supplied to conform to that appearing on the publication page of the WIPO application, but the new Abstract is typed on a separate page as required by U.S. practice. Applicants confirm that the Article 34 Amendment from the international stage should be entered for examination. A translation is provided herewith.


Applicants respectfully request that the preliminary amendment described herein be entered into the record prior to calculation of the filing fee and prior to examination and consideration of the above-identified application.

If a telephone conference would be helpful in resolving any issues concerning this communication, please contact Applicants' primary attorney-of record, Douglas P. Mueller (Reg. No. 30,300), at (612) 371.5237.

Respectfully submitted,

MERCHANT & GOULD P.C.
Post Office Box 2903
Minneapolis, Minnesota 55402-0903
(612) 332-5300

Dated: August 2, 2001

By 
Douglas P. Mueller
Reg. No. 30,300

DPM/rw



09/890758

CLAIMS

(Amended under PCT Article 34)

1. (Amended) An image sensor comprising:

5 a transparent cover having a first surface on an image reading region side, and a second surface away from the first surface;

10 a light source throwing light to the image reading region from a second-surface side of the transparent cover; and

a plurality of light receiving elements each receiving reflected light from the image reading region and outputting an image signal corresponding to an amount of the light received;

15 characterized that the transparent cover includes a transparent main body of a synthetic resin, and a transparent glass member corresponding to the image reading region,

20 that the transparent main body has a groove corresponding to the image reading region, the transparent glass member being placed in the groove; and

that the transparent main body and the transparent glass member each has a surface which is flush with each other and provides the first surface.

25

2. (Deleted)

3. (Amended) The image sensor according to Claim 1, wherein the groove is provided by a through hole formed in the transparent cover.

5 4. (Deleted)

5. (Amended) An image sensor comprising:

10 a transparent cover having a first surface on an image reading region side, and a second surface away from the first surface;

15 a light source throwing light to the image reading region from a second-surface side of the transparent cover; and

20 a plurality of light receiving elements each receiving reflected light from the image reading region and outputting an image signal corresponding to an amount of the light received;

25 characterized that the transparent cover includes a transparent main body of a synthetic resin, and a transparent glass member corresponding to the image reading region,

that the transparent main body has a groove corresponding to the image reading region, the transparent glass member being placed in the groove,

that the transparent glass member is exposed on a first-surface side, and

that the image reading region is linear, the transparent

cover having a nontransparent region corresponding to an end portion of the image reading region.

5 6. (Amended) The image sensor according to Claim 5, wherein the nontransparent region is formed with a white spot or a black spot.

10 7. The image sensor according to Claim 5, wherein the nontransparent region is formed with both of the white spot and the black spot.

15 8. (Amended) The image sensor according to Claim 5, wherein the image reading region is linear, the transparent cover having a nontransparent region corresponding to the other end portion of the image reading region.

20 9. The image sensor according to Claim 8, wherein one of the nontransparent regions is formed with a white spot and the other is formed with a black spot.

10. The image sensor according to Claim 5, wherein the nontransparent region is provided by a part of the glass member rendered nontransparent.

25 11. The image sensor according to Claim 10, wherein the nontransparent region is provided by a part of the glass member applied with a coating.

12. The image sensor according to Claim 10, wherein the nontransparent region is provided by a nontransparent member pasted to a part of the glass member.

5 13. The image sensor according to Claim 5, wherein the nontransparent region is provided by a nontransparent member separate from the glass member and the cover main body, placed in the groove.

10 14. The image sensor according to Claim 13, wherein the groove is divided into a glass member receiving portion for receiving the glass member and a nontransparent member receiving portion for receiving the nontransparent member.

15 15. (Amended) A transparent cover for image sensor, comprising a transparent main body of a synthetic resin, and a transparent glass member placed in a groove formed in a surface of the cover member,

20 the groove having at least a longitudinal end portion provided with a nontransparent region.

25 16. (Amended) A transparent cover for image sensor, comprising a transparent main body of a synthetic resin, and a transparent glass member placed in a groove formed in a surface of the cover member,

the transparent main body and the transparent glass

member each having a surface flush with each other and providing the first surface.

17. (Amended) The transparent cover according to Claim 16,
5 further comprising a nontransparent region provided at least at one longitudinal end portion of the groove.

9/PRTS

JC17 Rec'd PCT/PTO 0 2 AUG 2001
09/890758

SPECIFICATION

IMAGE SENSOR AND TRANSPARENT COVER FOR THE SAME

5 Technical Field

The present invention relates to an image sensor for reading a document image, and a transparent cover for the image sensor.

10 Background Art

9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194

The transparent cover attached to the case seals the case thereby preventing dirt from coming into the case as well as guiding the document. Also, the transparent cover provides a predetermined distance between the document and the lens array, thereby allowing the document image to appropriately focus on the light receiving elements.

Conventionally, the transparent cover is entirely made of glass or entirely made of resin, and therefore associated with the following problems.

Specifically, if the transparent cover is entirely made of glass, the cover can be broken easily upon impact given to the image sensor, with the broken pieces of glass scattering instantly. This problem is more serious if the image sensor is used as a handy scanner, which can be accidentally dropped by the user.

On the other hand, if the transparent cover is entirely made of synthetic resin, the cover is more impact resistant and is less susceptible to cracking for example. However, the synthetic resin cover has a low surface hardness as compared with the glass cover, and therefore is more susceptible to surface damage. For example, contact with a platen roller, dirt inclusion and so on can damage the surface relatively easily, deteriorating light transmission (transparency) of the transparent cover. The surface damage of the transparent cover causes distortion when reading the image, resulting in a problem of decreased quality of the read image.

Conventionally, in an attempt to solve these problems, there is available a transparent cover made of synthetic resin having an upper surface formed with a groove, and image reading of the document is performed by utilizing the groove. A
5 transparent cover formed with such a groove does not allow the platen roller to contact the transparent cover even if the platen roller is faced to the groove for example. Therefore, the transparent cover is not damaged by the contact with the platen roller. However, a transparent cover having
10 such a groove has another problem of frequent jamming of the document, since the groove can easily catch a front edge of the document being fed by the platen roller. Still another problem is that the transparent cover having such a groove as the above easily collect dirt in the groove. The dirt in
15 the groove decreases transparency of the groove of the transparent cover, and can be a cause of trouble in the reading of the document image.

On the other hand, the image sensor should desirably have capability to adjust output level of the read image. The
20 output level adjustment can be achieved by e.g. using a method commonly called "white level adjustment" or simply "darkness adjustment". According to this method, before reading the document image, reading of a white platen roller faced to the transparent cover is preformed to obtain an image signal
25 representing a white image. Next, determination is made whether or not the output level of this image signal is appropriate. If the output level is not appropriate,

adjustment is made to a light source voltage or to sensitivity of the light receiving elements, based on the current output level, so that the output level for the white image comes to a predetermined appropriate level. Amount of light emission
5 from the light source provided by e.g. LEDs, is influenced by temperature. Likewise, the sensitivity of the light receiving elements provided by semiconductors fluctuates with ambient temperature changes. The output level adjustment for the white image performed in accordance with
10 the above described method is made under a condition representing a realistic operating condition, i.e. under an actual operating temperature. This makes sure that the image reading operation is performed, with the output level appropriately adjusted to the actual operating temperature.
15 As a result, a read image true to the document image is obtained. Conventionally however, if the image sensor is utilized in e.g. the handy scanner, it is not possible to perform such an output level adjustment by using the white platen roller, since the handy scanner is not provided with the platen roller.
20 Therefore, the conventional image sensor is problematic also in such a sense as the above.

DISCLOSURE OF THE INVENTION

It is therefore an object of the present invention to
25 increase impact resistance of the transparent cover and to reduce susceptibility of the transparent cover to flaw that interferes with image reading operation, thereby

facilitating the image reading operation without causing such a problem as document jamming.

According to a first aspect of the present invention, an image sensor is provided. This image sensor comprises: a transparent cover having a first surface on an image reading region side, and a second surface away from the first surface; a light source throwing light to the image reading region from a second-surface side of the transparent cover; and a plurality of light receiving elements each receiving reflected light from the image reading region and outputting an image signal corresponding to an amount of the light received. The image sensor is characterized in that the transparent cover includes a transparent main body of a synthetic resin and a transparent glass member corresponding to the image reading region, and that the transparent glass member is exposed on a first surface side of the transparent cover.

According to the image sensor with the above arrangement, first, part of the transparent cover surface corresponding to the image reading region is provided by a glass surface. Therefore, this particular part is no longer prone to damage, eliminating or at least reducing the problem of decreased quality of a read image due to surface damage in the transparent cover. Second, the cover main body, which is a main component of the transparent cover, is made primarily of synthetic resin, and the glass member is utilized only partially. This makes it possible to increase impact

resistance of the cover main body thereby making it less prone to crack and other damages, as well as facilitating weight reduction of the image sensor. Thus, the image sensor according to the present invention is particularly suitable
5 for a handy scanner in which weight reduction is highly required.

Preferably, the transparent main body has a groove corresponding to the image reading region, and the transparent glass member is placed in the groove. Also,
10 preferably, the groove is provided by a through hole formed in the transparent cover.

According to an image sensor with such arrangements as the above, the glass member is protected by the cover main body, and therefore it becomes possible to give increased
15 protection from damage, not only to the cover main body but also to the glass member. Thus, the image sensor according to the present invention is particularly suitable for a handy scanner which is prone to impact.

Preferably, the transparent main body and the transparent
20 glass member each have a surface flush with each other and these surfaces provide the first surface.

According to an image sensor of such an arrangement as the above, the cover main body and the glass member provided therein form a flat surface without stepped level differences.
25 Therefore, when the image sensor according to the present invention is utilized in an image reading apparatus, it becomes possible not to let a document be caught by the

transparent cover surface during image reading operation. Also, even if the transparent main body has a groove, it becomes possible not to allow dirt to build in the groove. Therefore, the image reading operation can be performed
5 appropriately.

Preferably, the image reading region is linear, and the transparent cover has a nontransparent region corresponding to at least one end portion of the image reading region.

Such an arrangement enables to provide a nontransparent
10 region without interfering with normal image reading operation and also to perform image reading operation for the nontransparent region. By utilizing the image signal obtained by reading the nontransparent region, an output level adjustment of the read image which is the same as or
15 similar to the "white level adjustment" described earlier can be performed. Therefore, even if the image sensor is utilized in a handy scanner which does not have a platen roller, an output level adjustment of the read image can be performed according to the present invention. Therefore, the present
20 invention enables to obtain a high quality read image superior in image reproducibility.

Preferably, the nontransparent region is formed with at least one of a white spot and a black spot. Further, preferably, the nontransparent region is formed with both of
25 the white spot and the black spot.

According to such arrangements, when performing the output level adjustment of the read image after performing

image reading of the nontransparent region, the output level adjustment can be made appropriately, based on both or one of the image signal representing the white spot and the image signal representing the black spot.

5 Preferably, the image reading region is linear, and the transparent cover has nontransparent regions respectively corresponding to end portions of the image reading region.

 Preferably, one of the nontransparent regions is formed with a white spot, and the other is formed with a black spot.

10 Preferably, the nontransparent region is provided by a part of the glass member rendered nontransparent. More preferably, the nontransparent region is provided by a part of the glass member applied with a coating. Also, more preferably, the nontransparent region is provided by a
15 nontransparent member pasted to a part of the glass member.

 According to such arrangements, there no longer is need for first preparing a dedicated nontransparent member separately from the glass member, and then assembling the dedicated member to the transparent cover as means for
20 providing the nontransparent region in the transparent cover. Therefore, it becomes possible to restrict increase in the number of parts necessary for the transparent cover, and increase in manufacturing cost.

 Preferably, the nontransparent region is provided by a
25 nontransparent member separate from the glass member and the cover main body, placed in the groove.

With such an arrangement, although it is necessary to prepare a nontransparent member separately from the main body and the glass member; assembling operation of the nontransparent member to the cover main body can be performed easily by simply fitting the member into the groove of the cover main body.

Preferably, the groove is divided into a glass member receiving portion for receiving the glass member and a nontransparent member receiving portion for receiving the nontransparent member.

According to a second aspect of the present invention, a transparent cover for image sensor is provided. This transparent cover comprises a transparent main body of a synthetic resin and a transparent glass member placed in a groove formed in a surface of the main body.

When utilizing such a transparent cover for image sensor, the groove in the cover main body and the glass member fitted therein are placed in an image reading region of the image sensor. This provides the same effect as offered by the image sensor provided by the first aspect of the present invention.

Preferably, the transparent glass member placed in the groove has a surface flush with a surface of the transparent main body.

According to the image sensor of a structure such as the above, the cover main body and the glass member provided therein form a flat surface without stepped level differences. This provides the same effect as offered by the image sensor

provided by the first aspect of the present invention.

Preferably, the transparent cover further comprises a nontransparent region provided at least at one longitudinal end portion of the groove.

5 According to such an arrangement, when placing the groove in the cover main body and the glass member fitted therein are placed in a linear image reading region of the image sensor, it becomes possible to dispose the nontransparent region at a longitudinal end portion of the image reading region. Thus,
10 by performing image reading of the nontransparent region, the above described output level adjustment of the read image can be performed.

Other objects, characteristics, and advantages of the present invention will become clear from the following
15 description of embodiments to be presented with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a transparent cover for
20 image sensor, according to the present invention.

Fig. 2 is a sectional view taken in lines II-II in Fig. 1.

Fig. 3 is a sectional view taken in lines III-III in Fig. 1.

25 Fig. 4 is an explosive view of the transparent cover shown in Fig. 1 through Fig. 3.

Fig. 5 is a sectional view showing an example of how glass is fixed to a cover main body of the transparent cover.

Fig. 6 is a sectional view showing another example of how glass is fixed to a cover main body of the transparent cover.

5 Fig. 7 is a sectional view showing an image sensor according to the present invention.

Fig. 8 is a sectional view taken in lines VIII-VIII in Fig. 7.

10 Fig. 9 is a sectional view showing another image sensor according to the present invention.

Fig. 10 is a sectional view showing still another image sensor according to the present invention.

Fig. 11 is a sectional view showing another transparent cover for image sensor, according to the present invention.

15 Fig. 12 is a sectional view showing another transparent cover for image sensor, according to the present invention.

Fig. 13 is a sectional view showing another transparent cover for image sensor, according to the present invention.

20 Fig. 14 is a sectional view showing another transparent cover for image sensor, according to the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

Now, preferred embodiments of the present invention will be described specifically, with reference to the attached
25 drawings.

Referring to Fig. 1 through Fig. 4, a transparent cover 1 for image sensor, according to the present embodiment

comprises a cover main body 10 and a glass bar 20.

The cover main body 10 is made of a synthetic transparent resin such as polymethyl methacrylate (PMMA) and polycarbonate (PC), and is formed into a rectangular plate as a whole. The cover main body 10 has a surface 10a (an upper surface of the cover main body 10 as in Figs. 1 through 4) formed with a straight groove 11 longitudinally of the cover main body 10. The groove 11 has a constant width and a constant depth. The cover main body 10 has longitudinal edges respectively provided with engaging projections 12a, 12b.

The glass bar 20 is made of a transparent glass material. As shown in Figs. 1, 2 and 4, the glass bar 20 is provided with a nontransparent region 3. The nontransparent region 3 includes a white spot 30 provided by a white coating and, a black spot 31 provided by a black coating. The coatings are made side by side on a back surface of a longitudinal end portion 20b of the transparent glass bar 20. Alternatively, the coatings may not only cover the back surface of the end portion 20b of the glass bar 20 but also cover the upper surface and/or side surfaces.

The glass bar 20 is embedded in the groove 11 of the cover main body 10. With this construction, the nontransparent region 3 locates at an end portion of the groove 11, according to the transparent cover for an image sensor shown in Figs. 1 through 4. On the other hand, as clearly shown in Fig. 2, the glass bar 20 has an upper surface 20a flush with the upper surface 10a of the cover main body 10. Thus, the entire upper

surface of the transparent cover is flat without stepped level differences.

As shown in Fig. 5, the glass bar 20 is bonded to the cover main body 10 via two adhesive layers 4. This reliably fixes the glass bar 20 to the cover main body 10. The adhesive layers 4 are formed by applying a transparent adhesive to two longitudinal side walls 11a of the groove 11. Such an arrangement allows to keep the upper surface 20a and the lower surface 20c of the glass bar 20 free of the adhesive when attaching the glass bar 20 to the transparent cover 1, making it possible to maintain a high transparency thicknesswise of the glass bar 20.

Alternatively to the above, as shown in Fig. 6 for example, the two adhesive layers 4 may be provided on a bottom surface 11b of the groove 11, excluding however, a widthwise center portion of the bottom surface 11b. Such an arrangement also allows maintaining a high thicknesswise transparency of the glass bar 20. Thus, the widthwise center portion of the glass bar 20 allows light to pass appropriately when the transparent cover 1 is used as a part of an image sensor, as will be described later. In the arrangement shown in Fig. 6, preferably, the bottom surface 11b of the groove 11 is formed with recesses 13 of an appropriate depth, and the adhesive layers 4 are formed respectively in the recesses 13. Such an arrangement can appropriately prevent the glass bar 20 from being raised by as much as the thickness of adhesive, making it easy to make the upper surface 20a of the glass bar 20 flush with the

upper surface 10a of the cover main body 10. Alternatively to the adhesive, the bonding of the glass bar 20 to the cover main body 10 may be achieved by using a double-sided adhesive tape, according to the present invention. Further, the glass bar 20 may not ever be bonded to the cover main body 10. Specifically, the glass cover 20 may be sized to fit the groove 11, and fixed into the cover main body 10 by means of press fitting.

Now, an image sensor according to the present invention will be described with reference to Fig. 7 and Fig. 8.

In Fig. 7, an image sensor A according to the present embodiment is utilized in a sheet feeding type scanner comprising a platen roller 6. In addition to the transparent cover 1 described above, the image sensor A further comprises a case 50, a substrate 51, a plurality of light sources 52, a plurality of light receiving elements 53, and a lens array 54. In Fig. 7, a longitudinal direction of the transparent cover 1 represents a main scanning direction, whereas a direction perpendicular thereto represents a sub scanning direction.

The case 50 is made e.g. of a white synthetic resin, and extends in the main scanning direction as shown in Fig. 8. The case 50 has a light guiding space 50a which is a through hole thicknesswise of the case 50 and extends longitudinally of the case 50. The case 50 is formed with engaging recesses 50b, 50c on its upper surface side (top surface side) for engagement with the engaging projections 12a, 12b of the

transparent cover 1. The engagement between the engaging projections 12a, 12b with the engaging recesses 50b, 50c keeps the transparent cover 1 fixed in the case 50. The light guiding space 50a has an upper opening, which is sealed by the transparent cover 1. The platen roller 6 for feeding a document D in the sub scanning direction indicated by arrows is faced onto the upper surface 20a of the glass bar 20.

The substrate 51 is assembled onto a lower side (bottom side) of the case 50 to seal a lower opening of the light guiding space 50a. The light sources 52 are provided e.g. by LEDs, and placed in a row in the main scanning direction on the substrate 51. With this construction, the light guiding space 50a serves as a passage for light emitted from the light sources 52 for illumination from below the transparent cover 1. As has been described, the case 50 is made of a white synthetic resin, and therefore walls of the light guiding space 50a provides a white reflection surface having a high index of reflectance. The light guiding space 50a has a section capable of guiding the light from the light sources 52 to an entire surface of the glass bar 20 of the transparent cover 1.

The lens array 54 focuses light reflected by the document D, thereby forming a line of image of the document D on the array of the light receiving elements 53. The lens array 54 can be provided e.g. by a plurality of self focusing lenses (known as "selfoc lenses") capable of forming an image of the document without magnification nor inversion. The selfoc

lenses are held in a row by a lens holder. According to the present invention, the selfoc lens array may be replaced by e.g. a convex lens array or an array of other optical lenses. The lens array 54 is fitted into a groove 50d of the case 50, thereby being laid along the main scanning direction. The lens array 54 is provided on the backside of the transparent cover and faced towards the glass bar 20 of the transparent cover 1.

The light receiving elements 53, mounted in a row in the main scanning direction in the upper surface of the substrate 51, have their light receiving surfaces faced toward the lens array 54 and spaced from the lens array 54 by a predetermined distance. Each of the light receiving elements 53 has photoelectric transfer capability, of receiving light focused by the lens array 54 and outputting an image signal having a level corresponding to an amount of the light received. The light receiving elements 53 are surrounded by a black-colored assisting member 55. Since the case 50 is made of a white resin, this arrangement prevents the light from reflecting irregularly on the white walls around the light receiving elements 53 which could cause adverse effect to the read image.

The light receiving elements 53, facing the lens array 53 and disposed in the main scanning direction, can read an image of the document D in a linear region extending in the main scanning direction. This region corresponds to an image reading region S according to the present invention. The

image reading region S also extends in a direction of optical axis (shown by a line indicated by reference code C in Fig. 7) of the lens array 54. Therefore, the image reading region S includes not only the upper surface of the transparent cover but also adjacent regions off the surface in thicknesswise directions of the transparent cover 1. However, in the image sensor A according to the present embodiment, the lens array 54 has a focal point on the upper surface 20a of the glass bar 20, and the transparent cover 1 is so mounted that the groove 11 and the glass bar 20 have their respective widthwise center aligned with the image reading region S.

As shown in Fig. 8, the transparent cover 1 has the nontransparent region 3 at an end portion of the image reading region S that extends in the main scanning direction. The lens array 54 has an end portion 54a defined by a range La, which faces the nontransparent region 3 and includes a plurality of light receiving elements 53 (hereinafter called light-receiving elements for adjustment). These light-receiving elements 53 for adjustment reads an image of the nontransparent region 3, whereas the remaining light receiving elements 53 included in the remaining range Lb performs reading of the document D.

The image sensor according to the present invention performs reading operation as follows: First, in Fig. 7, light is emitted from the light source 52 for reading an image of the document D. The light illuminates the document D placed on the surface 1a of the transparent cover 1 and then is

reflected. Light reflected by the document D in the linear,
image-reading region S passes the glass bar 20 of the
transparent cover 1, into the image sensor A, and travels
toward the lens array 54. The light is then focused by the
5 lens array 54, on the light receiving surfaces of the light
receiving elements 53. Since the glass bar 20 has a high
hardness, its surface is not easily damaged by contact with
the platen roller 6 or other causes. On the other hand, the
upper surface 10a of the cover main body 10, which is made
10 of a synthetic resin, is more susceptible to the damage, yet
the damage, which is not made in the image reading region S,
does not pose a major problem in the image reading operation.
Therefore, it becomes possible to minimize the problem of
distortion in a read image of the document D due to the surface
15 damage in the transparent cover 1. Further, when the glass
cover 20 is fitted into the groove 11 of the cover main body
10, the upper surfaces of the two members are made flush with
each other. This eliminates another of the problems that the
document D is caught by the surface of the transparent cover
20 1 and interferes with the reading operation of the document
D.

Moreover, the transparent cover 1, made primarily of a
synthetic resin that forms the cover main body 10, is light
and impact-resistant. This facilitates weight reduction,
25 with the glass bar 20 which is of a small size. Further, the
glass bar 20 is embedded in the groove 11, thereby being
protected by the cover main body 10. Therefore, not only the

cover main body 10 but also the glass bar 20, of the transparent cover 1 is well protected from crack and other damages. Since the cover main body 10 is made of a synthetic resin, it is easy to provide the cover main body 10 with e.g. the engaging
5 projections 12a, 12b by means of injection molding performed with appropriate metal tooling. Thus, it is possible to form an appropriate shape that facilitates e.g. assembling to the case 50.

According to the image sensor A provided by the present
10 invention, it is possible to perform an output level adjustment for read image, prior to the above described image reading operation of the document D, without using the platen roller 6. Specifically, when performing the output level
15 adjustment for read image, the light sources 52 is turned on without the document D supplied on the transparent cover 1, and image reading operation for the white spot 30 and the black spot 31 in the nontransparent region shown in Fig. 8 is performed. The nontransparent region 3 is located only slightly below the upper surface 20a of the glass bar 20, so
20 an obtained image is only slightly out of focus. The image reading operation of the nontransparent region 3 yields image signal of a high output level for the white spot 30 and image signal of a low output level for the black spot 31. By referring to output levels of these two image signals, it
25 becomes possible to change e.g. a voltage to be applied to the light source 52, thereby making the image signal output level truly correspond to darkness or color tone of the image

in the document D.

Fig. 9 and Fig. 10 are sectional views each showing another embodiment of the image sensor according to the present invention. It should be noted here that in Fig. 9 and thereafter, components identical with those in the previous embodiment will be indicated by the same reference codes and description therefor will not be repeated.

Image sensors Aa shown in Fig. 9 and Fig. 10 differ from the image sensor A according to the previous embodiment in that a document placement position, i.e. a position that allows the lens array 54 to focus the document image, is provided not on the upper surface 20a of the glass cover 20, but slightly below the upper surface 20a by a distance h. All the other aspects are common to those in the image sensor A according to the previous embodiment.

According to an arrangement in the embodiment in Fig. 9, the image sensor Aa is utilized as a component for a handy scanner. In the handy scanner, the case 50 or a frame (not illustrated) that supports the case 50 is provided with a roller (not illustrated), and the surface 1a of the transparent cover 1 is spaced from a document D' by the predetermined distance h. It is for this reason that the focal point of the lens array 54 of the image sensor Aa differs from that of the previous image sensor A. When the image sensor Aa is used as a handy scanner component, the transparent cover 1 of the image sensor Aa is exposed to outside and therefore is prone to impact from being hit by various objects.

However, as has been described, the transparent cover 1 is superior in impact resistance. Further, the image sensor Aa can perform the output level adjustment for the read image by itself, by using the nontransparent region (not illustrated in Fig. 9 but the same as in the previous embodiment). This provides a special advantage in handy scanners which cannot use the platen roller in the output level adjustment.

According to an arrangement in Fig. 10, the image sensor Aa is utilized in a sheet feed type scanner similarly as in the image sensor A. A difference however, is that a transparent glass plate 7 having a thickness H is placed between the platen roller 6A and the transparent cover 1. The embodiment in Fig. 10 uses the image sensor Aa in Fig. 9 without any design changes. For this reason, the thickness H of the transparent glass is selected to satisfy the following equation: $H = \{1 + (n - 1) / n\} h$, where n represents a refractive index of the transparent glass, H represents the thickness thereof, and h represents the distance from the document D' to the surface 1a of the transparent cover. This arrangement enables to obtain well-focused read image, even with the addition of the transparent glass 7.

As has been described, the image sensor according to the present invention can be utilized in whichever one of the sheet feed type scanner and the handy scanner, or can serve both modes. Yet, specific application of the image sensor according to the present invention is not limited by these,

but can include a variety of scanners other than those mentioned above, facsimile machine, and other equipment.

Figs. 11 through 14 are sectional views each showing another embodiment of the transparent cover for image sensor,
5 according to the present invention.

Fig. 11 shows a transparent cover 1A, which comprises the glass bar 20 provided with two nontransparent regions 3A, 3A'. The nontransparent region 3A is provided by a white coating, whereas the other nontransparent region 3A' is provided by
10 a black coating. As described above, according to the present invention, the white spot and the black spot may be provided separately at respective end portions of the glass bar 20.

Note should be made however, that according to the present invention, if the nontransparent region is provided in the transparent cover, the nontransparent cover may not include
15 both of the white spot and the black spot, but may include only one spot colored in white or black. Further, the nontransparent region may not be black or white but may be in another color, although black or white is desirable as a
20 reference color when reading an image for the purpose of read image output level adjustment. Further, the nontransparent region can be provided by other means. For example, color coating a part of the glass bar 20 may be replaced by pasting a nontransparent member to a part of the glass bar 20, such
25 as a piece of nontransparent film or sheet.

Referring now to Fig. 12, according to a transparent cover 1B, a nontransparent member 8 which is separate from the glass

bar 20 is fitted at an end portion of the groove 11 of the cover main body 10. This nontransparent member 8 provides a nontransparent region 3B. Since the nontransparent member 8 should only be fitted into the groove 11, assembling operation to the cover main body 10 can be achieved easily in the same way as for the fitting of the glass bar 20.

Referring to Fig. 13, a transparent cover 1C comprises the cover main body 10, which is formed with two grooves 11, 11a separately from each other. The groove 11 is fitted with the transparent glass bar 20. The other groove 11a is fitted with a nontransparent member 8A, providing the transparent cover 1C including a nontransparent region.

Referring to Fig. 14, according to a transparent cover 1D, the groove 11 is provided by a through hole that penetrates the cover main body 10 thicknesswise. The groove 11 as a through hole further facilitates weight reduction of the transparent cover 1. However, the groove 11 as a through hole decreases strength of the cover main body 10 accordingly. Therefore, in view of increasing overall strength of the transparent cover, it is preferred that the groove be provided not as a through hole.

With some variations described above, specific arrangements in the transparent cover for image sensor and the image sensor according to the present invention are not limited to those described in the embodiments and can be varied in many other ways.

CLAIMS

1. An image sensor comprising:

5 a transparent cover having a first surface on an image reading region side, and a second surface away from the first surface;

a light source throwing light to the image reading region from a second-surface side of the transparent cover; and

10 a plurality of light receiving elements each receiving reflected light from the image reading region and outputting an image signal corresponding to an amount of the light received,

15 characterized that the transparent cover includes a transparent main body of a synthetic resin, and a transparent glass member corresponding to the image reading region, the transparent glass member being exposed on a first surface side of the transparent cover.

20 2. The image sensor according to Claim 1, wherein the transparent main body has a groove corresponding to the image reading region, the transparent glass member being placed in the groove.

25 3. The image sensor according to Claim 2, wherein the groove is provided by a through hole formed in the transparent cover.

4. The image sensor according to Claim 2, wherein the transparent main body and the transparent glass member each has a surface flush with each other and providing the first surface.
- 5
5. The image sensor according to Claim 2, wherein the image reading region is linear, the transparent cover having a nontransparent region corresponding to at least one end portion of the image reading region.
- 10
6. The image sensor according to Claim 5, wherein the nontransparent region is formed with at least one of a white spot and a black spot.
- 15
7. The image sensor according to Claim 5, wherein the nontransparent region is formed with both of the white spot and the black spot.
- 20
8. The image sensor according to Claim 2, wherein the image reading region is linear, the transparent cover having nontransparent regions respectively corresponding to end portions of the image reading region.
- 25
9. The image sensor according to Claim 8, wherein one of the nontransparent regions is formed with a white spot and the other is formed with a black spot.

10. The image sensor according to Claim 5, wherein the nontransparent region is provided by a part of the glass member rendered nontransparent.

5 11. The image sensor according to Claim 10, wherein the nontransparent region is provided by a part of the glass member applied with a coating.

10 12. The image sensor according to Claim 10, wherein the nontransparent region is provided by a nontransparent member pasted to a part of the glass member.

15 13. The image sensor according to Claim 5, wherein the nontransparent region is provided by a nontransparent member separate from the glass member and the cover main body, placed in the groove.

20 14. The image sensor according to Claim 13, wherein the groove is divided into a glass member receiving portion for receiving the glass member and a nontransparent member receiving portion for receiving the nontransparent member.

25 15. A transparent cover for image sensor, comprising a transparent main body of a synthetic resin and a transparent glass member placed in a groove formed in a surface of the main body.

16. The transparent cover according to Claim 15, wherein the transparent glass member placed in the groove has a surface flush with a surface of the transparent main body.

5 17. The transparent cover according to Claim 15, further comprising a nontransparent region provided at least at one longitudinal end portion of the groove.

ABSTRACT

An image sensor (A) comprises a transparent cover (1) having a first surface on an image reading region side, and a second surface away from the first surface; a light source (52) throwing light to the image reading region from a second-surface side of the transparent cover; and a plurality of light receiving elements (53) each receiving reflected light from the image reading region and outputting an image signal corresponding to an amount of the light received. The transparent cover (1) includes a transparent main body (10) of a synthetic resin, and a transparent glass member (20) corresponding to the image reading region. The transparent glass member (20) is exposed on a first surface side of the transparent cover (1).

CERTIFICATE UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL658338650US

Date of Deposit: August 2, 2001


I hereby certify that this paper or fee is being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Commissioner for Patents, Washington, D C. 20231

By:

Name: Omesh Singh



2/9

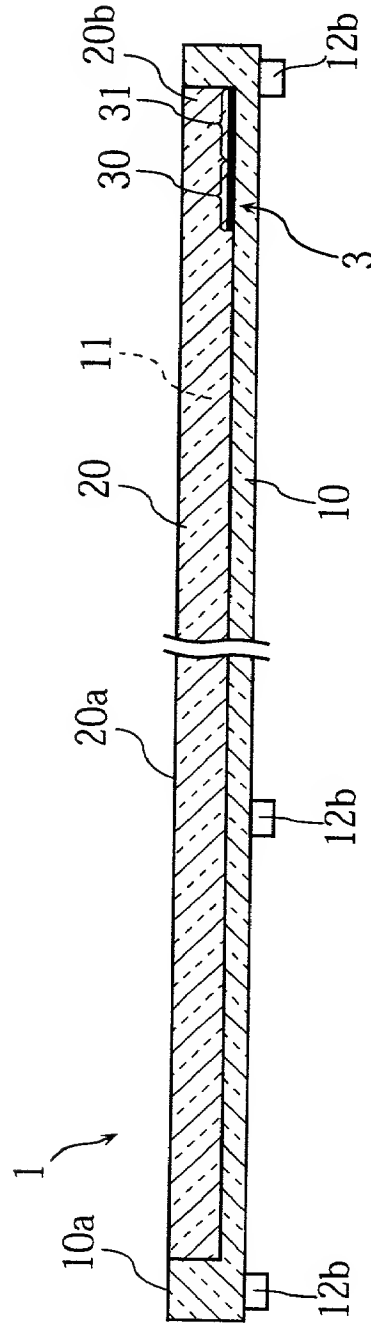

09/890758

FIG. 4

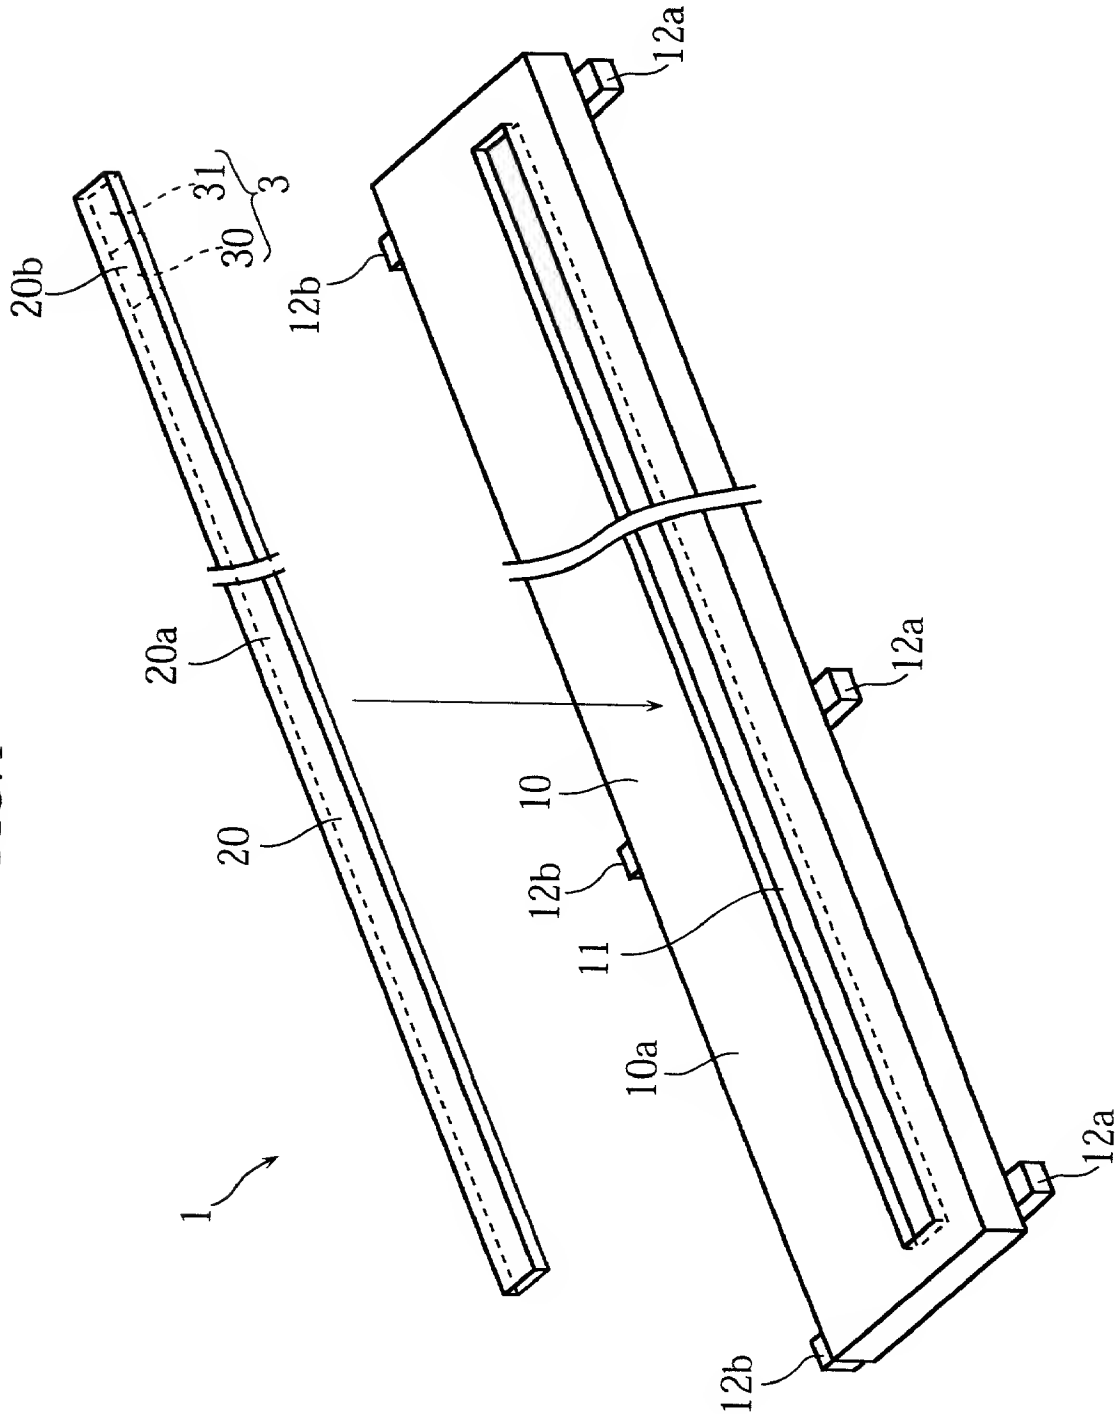


FIG.5

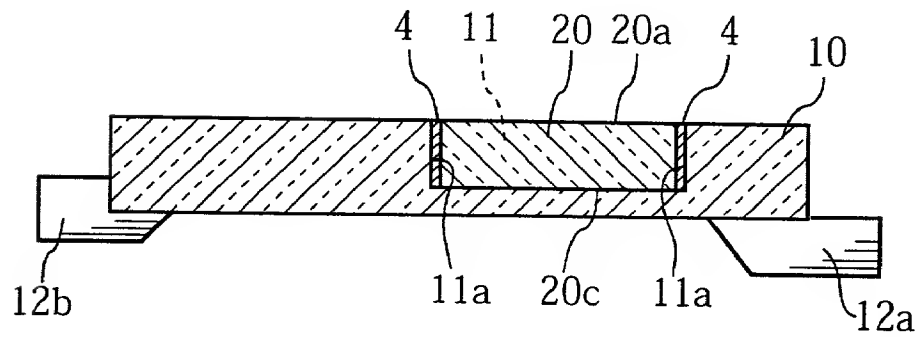


FIG.6

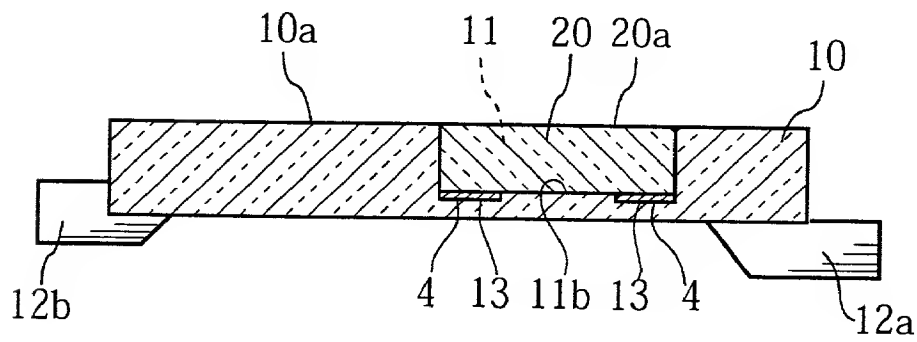


FIG. 7

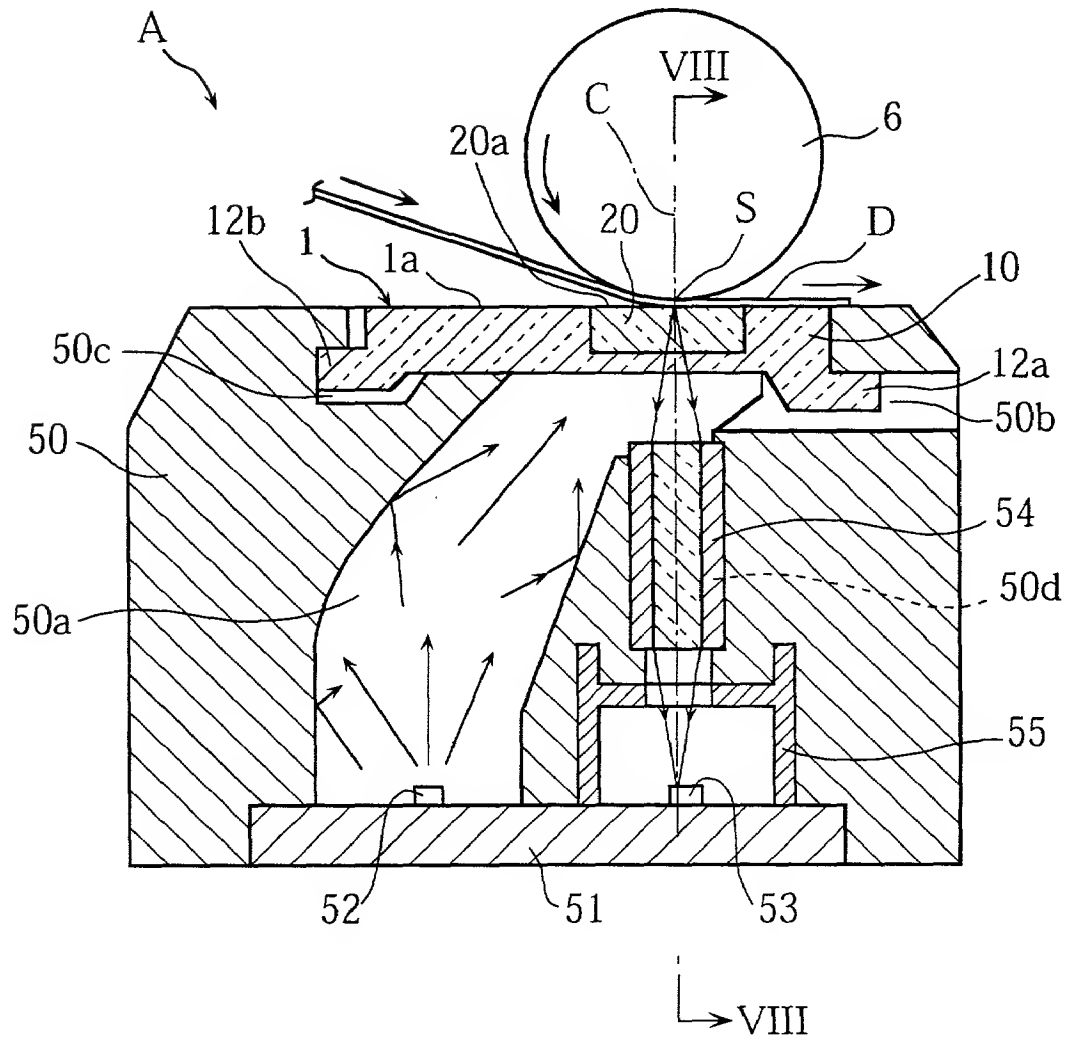


FIG. 8

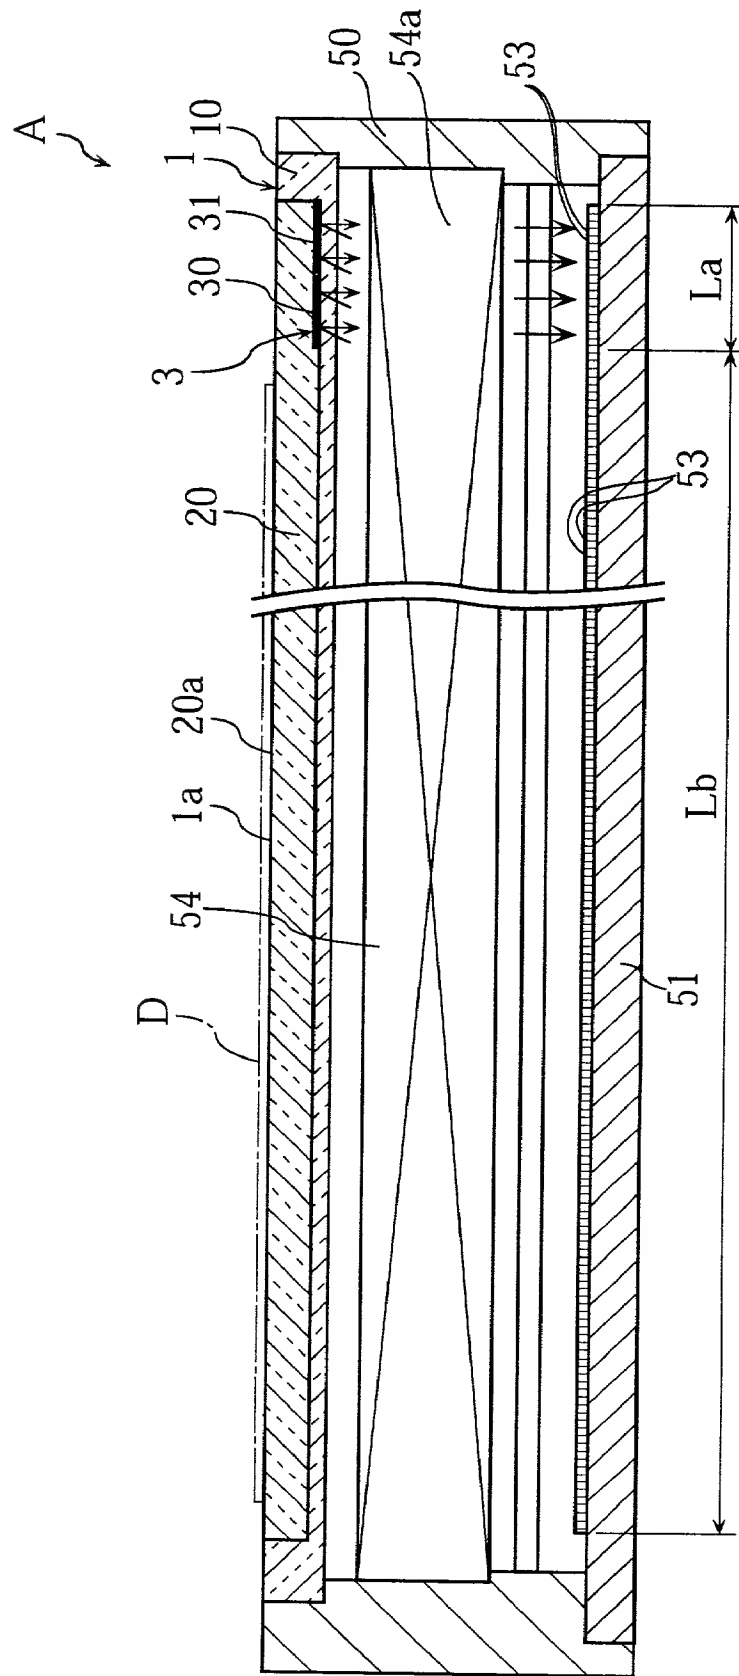


FIG.9

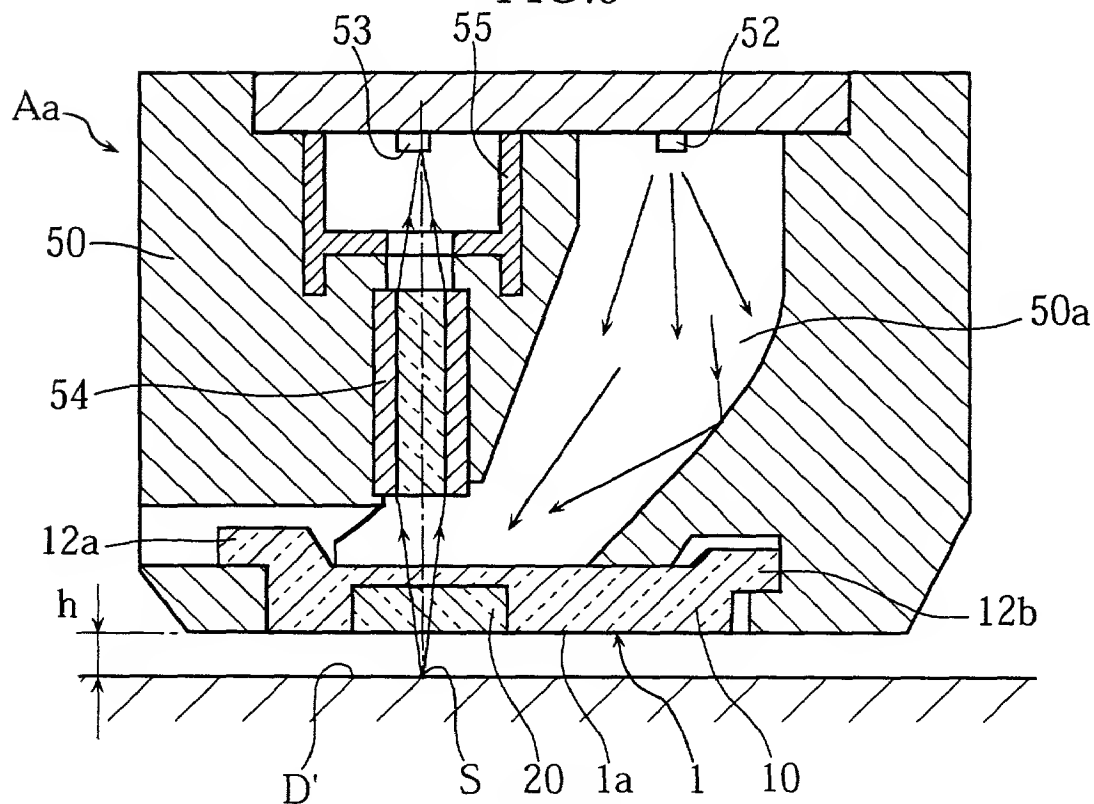


FIG.10

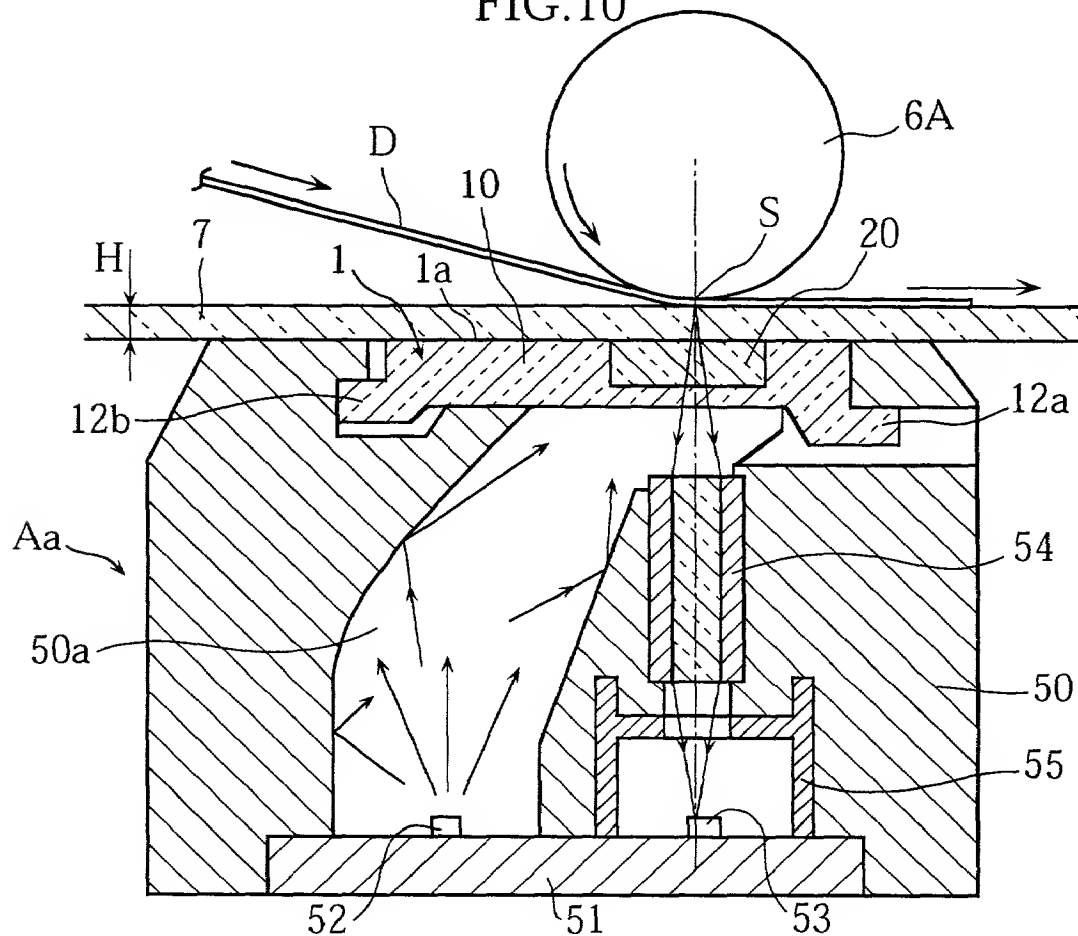


FIG.11


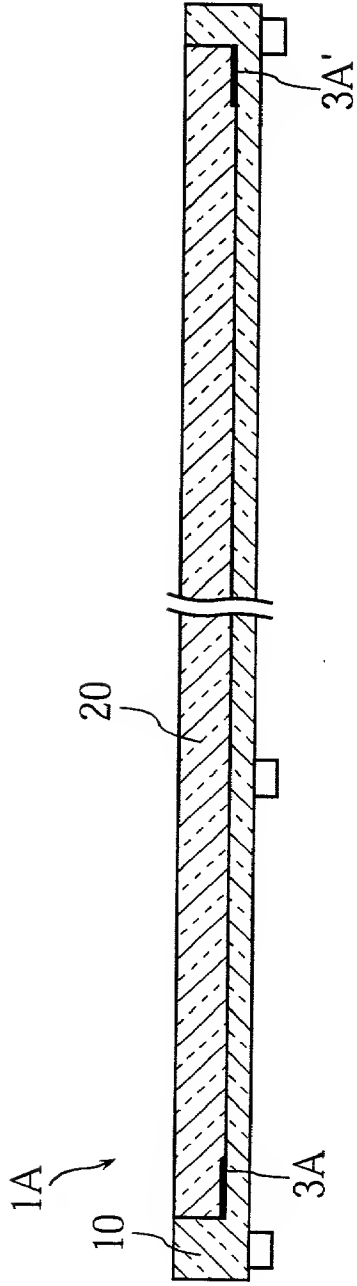


FIG.12

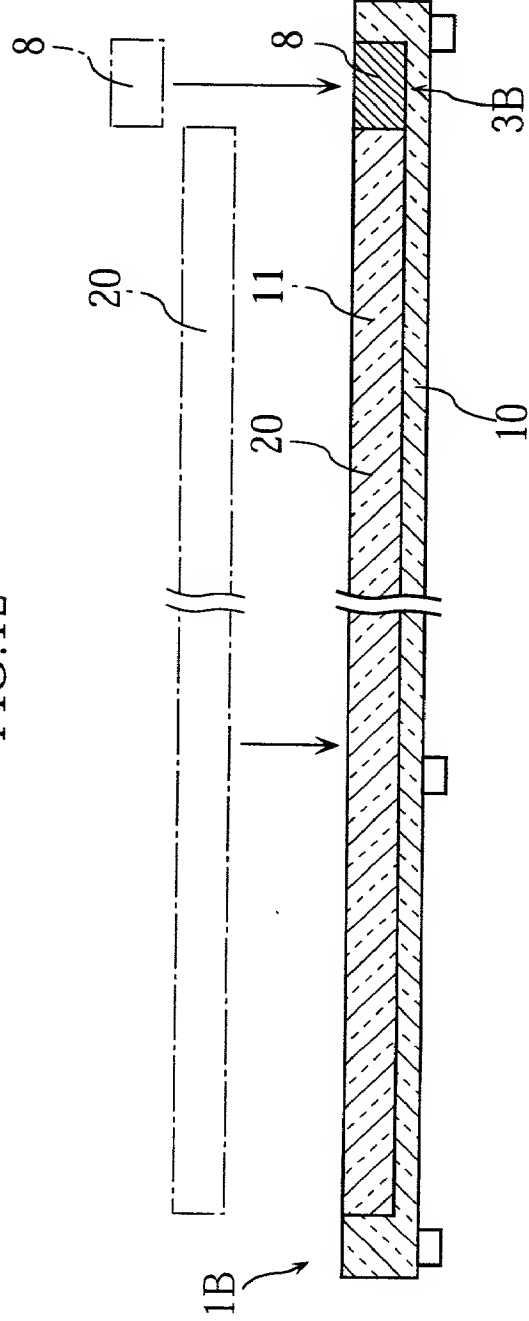

09/890758

FIG.13


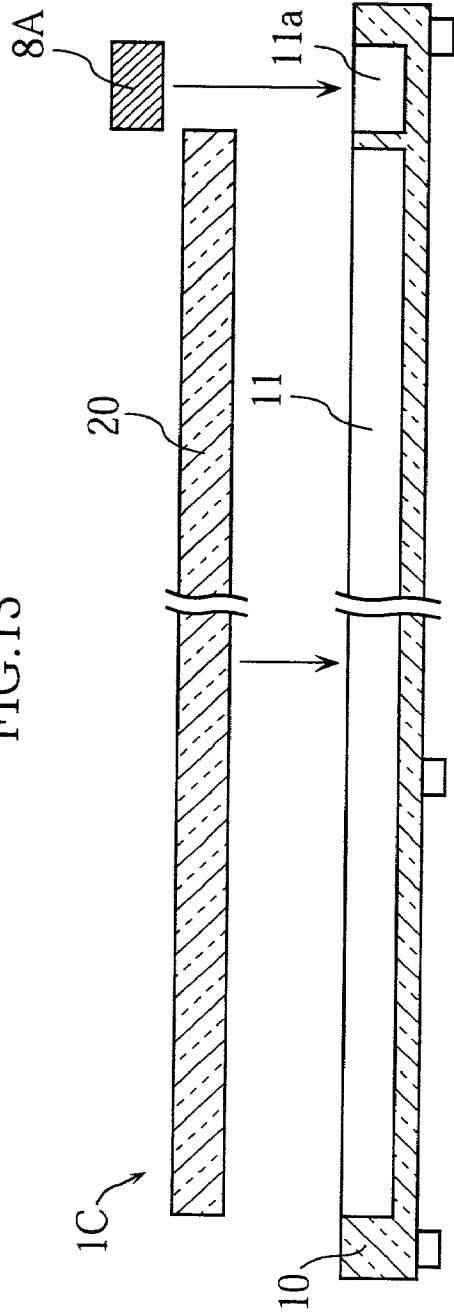


FIG.14

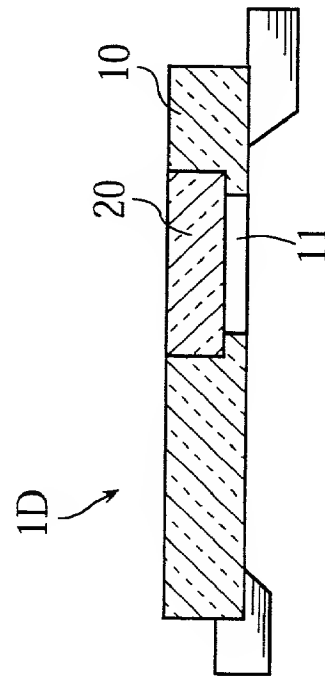

International Application No.: PCT/JP00/00578

International Filing Date: February 2, 2000

Assignee: Rohm Co., Ltd.

Title of the Invention: IMAGE SENSOR AND TRANSPARENT COVER
FOR THE SAME

DECLARATION

I, Yukio UENO, hereby declare:

that I am a professional translator residing in Osaka,
Japan;

that I am well acquainted with both the Japanese and English
languages;

that, for entering the national phase of the above-
identified international application, I have prepared an English
translation of the Japanese specification and claims as
originally filed with the Japanese Patent Office (Receiving
Office) and as amended under PCT Article 34; and


that the said English translation corresponds to the said
Japanese specification and claims to the best of my knowledge.

I also declare that all statements made herein of my
knowledge are true and that all statements made on information
and belief are believed to be true; and further that these
statements were made with the knowledge that willful false
statements and the like so made are punishable by fine or
imprisonment, or both, under Section 1001 of Title 18 of the
United States Code, and that such willful false statements may
jeopardize the validity of the application, any patent issuing
thereon, or any patent to which this verified statements is
directed.

Declared at Osaka, Japan on *July 16th*, 2001

By Yukio Ueno

Signature

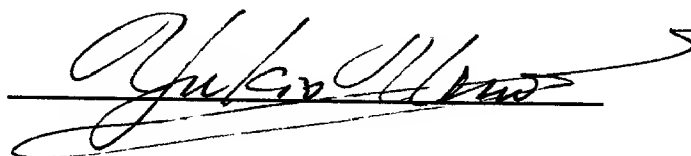A handwritten signature in black ink, appearing to read 'Yukio Ueno', is written over a horizontal line.

Declaration and Power of Attorney For Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

My residence, post office address and citizenship are as stated below next to my name,

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE SENSOR AND TRANSPARENT

COVER FOR THE SAME

その明細書を
(該当する方に印を付す)

the specification of which
(check one)

☐ is attached hereto.

☐ここに添付する。

☐ 第 _____ 日に出願番号 _____
号として提出し、
_____ 日に補正した。
(該当する場合)

☐ was filed on _____ as
Application Serial No. _____
and was amended on _____
(if applicable)

☐ 第 _____ 日に PCT 国際出願番号 _____
号として提出し、
PCT 第19条に基づき _____ 日に補正した。
(該当する場合)

☒ was described and claimed in PCT international application
No. PCT/JP00/00578 filed on
February 2, 2000
and as amended under PCT Article 19 or 34 on
October 13, 2000
(if applicable)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37部第1章第56条(a)項に従い、本願の審査に所要の情報を開示すべき義務を有することを認める。

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

Japanese Language Declaration

私は、合衆国法典第35部第119条 (a) - (d) 項または第365条 (a) - (b) 項にもとづく下記の外国特許出願または発明者証出願または少なくとも1つの合衆国以外の国を指定したPCT国際出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願または発明者証出願またはPCT国際出願を以下に明記する：

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(a)-(b) of any foreign application(s) for patent or inventor's certificate, or of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application on which priority is claimed:

Prior foreign applications

先の外国出願

(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
Patent Application No. 11-34349	Japan	12/2/1999

(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
------------------	-------------------	------------------------------------

(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
------------------	-------------------	------------------------------------

(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
------------------	-------------------	------------------------------------

(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
------------------	-------------------	------------------------------------

Priority claimed

優先権の主張

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし
<input type="checkbox"/>	<input type="checkbox"/>
Yes あり	No なし

私は、合衆国法典第35部第120条にもとづく下記の合衆国特許出願の利益または第365条 (c) 項にもとづく合衆国を指定するPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日またはPCT国際出願日の間に公表された連邦規則法典第37部第1章第56条 (a) 項に記載の所要の情報を開示すべき義務を有することを認める：

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (出願番号)	(Filing Date) (出願日)	(現況) (特許済み、係属中、放棄済み)	(Status) (patented, pending, abandoned)
------------------------------------	------------------------	-------------------------	--

(Application Serial No.) (出願番号)	(Filing Date) (出願日)	(現況) (特許済み、係属中、放棄済み)	(Status) (patented, pending, abandoned)
------------------------------------	------------------------	-------------------------	--

Japanese Language Declaration

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁固に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

委任状：私は、下記発明者として、以下の代理人をここに選任し、本願の手続を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。
(代理人氏名および登録番号を明記のこと)

Albrecht, John W.	Reg. No. 40,481
Ali, M. Jeffer	Reg. No. 46,359
Anderson, Gregg I.	Reg. No. 28,828
Batzli, Brian H.	Reg. No. 32,960
Beard, John L.	Reg. No. 27,612
Berns, John M.	Reg. No. 43,496
Black, Bruce E.	Reg. No. 41,622
Branch, John W.	Reg. No. 41,633
Bremer, Dennis C.	Reg. No. 40,528
Bruess, Steven C.	Reg. No. 34,130
Byrne, Linda M.	Reg. No. 32,404
Campbell, Keith	Reg. No. P-46,597
Carlson, Alan G.	Reg. No. 25,959
Caspers, Philip P.	Reg. No. 33,227
Chiapetta, James R.	Reg. No. 39,634
Clifford, John A.	Reg. No. 30,247
Daignault, Ronald A.	Reg. No. 25,968
Daley, Dennis R.	Reg. No. 34,994
Dalglisch, Leslie E.	Reg. No. 40,579
Daulton, Julie R.	Reg. No. 36,414
DeVries Smith, Kate	Reg. No. 42,157
DiPietro, Mark J.	Reg. No. 28,707
Edell, Robert T.	Reg. No. 20,187
Epp Ryan, Sandra	Reg. No. 39,667
Glance, Robert J.	Reg. No. 40,620
Goggin, Matthew J.	Reg. No. 44,125
Golla, Charles E.	Reg. No. 26,896
Gorman, Alan G.	Reg. No. 38,472
Gould, John D.	Reg. No. 18,223
Gregson, Richard	Reg. No. 41,804
Gresens, John J.	Reg. No. 33,112
Hamer, Samuel A.	Reg. No. P-46,754

Hamre, Curtus B.
Harrison, Kevin C.
Hertzberg, Brett A.
Hillson, Randall A.
Holzer, Jr., Richard J.
Johnston, Scott W.
Kadievitch, Natalie D.
Karjeker, Shaikat
Kastelic, Joseph M.
Kettelberger, Denise
Keys, Jeramie J.
Kneart, Homer L.
Kowalchuk, Alan W.
Kowalchuk, Katherine M.
Lacy, Paul A.
Larson, James A.
Leon, Andrew J.
Leonard, Christopher J.
Liepa, Mara E.
Lindquist, Timothy A.
Lycke, Lawrence E.
McDonald, Daniel W.
McIntyre, Jr. William F.
Mitchem, M. Todd
Mueller, Douglas P.
Nichols, A. Shane
Pauly, Daniel M.
Phillips, Bryan K.
Phillips, John B.
Plunkett, Theodore
Prendergast, Paul
Pytel, Melissa J.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and /or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Qualey, Terry	Reg. No. 25,148
Reich, John C.	Reg. No. 37,703
Reiland, Earl D.	Reg. No. 25,767
Samuels, Lisa A.	Reg. No. 43,080
Schmaltz, David G.	Reg. No. 39,828
Schuman, Mark D.	Reg. No. 31,197
Schumann, Michael D.	Reg. No. 30,422
Scull, Timothy B.	Reg. No. 42,137
Sebald, Gregory A.	Reg. No. 33,280
Skoog, Mark T.	Reg. No. 40,178
Spellman, Steven J.	Reg. No. 45,124
Stoll-DeBell, Kirsten L.	Reg. No. 43,164
Summer, John P.	Reg. No. 29,114
Swenson, Erik G.	Reg. No. 45,147
Telickson, David K.	Reg. No. 32,314
Trembath, Jon R.	Reg. No. 38,344
Tuchman, Ido	Reg. No. 45,924
Underhill, Albert L.	Reg. No. 27,403
Vandenburgh, J. Derek	Reg. No. 32,179
Wahl, John R.	Reg. No. 33,044
Weaver, Karrie G.	Reg. No. 43,245
Welter, Paul A.	Reg. No. 20,890
Whipps, Brian	Reg. No. 43,261
Whitaker, John E.	Reg. No. 33,044
Wickham, J. Scot	Reg. No. 41,376
Williams, Douglas J.	Reg. No. 27,054
Withers, James D.	Reg. No. 40,376
Witt, Jonelle	Reg. No. 41,980
Wu, Tong	Reg. No. 43,361
Xu, Min S.	Reg. No. 39,536
Zeuli, Anthony R.	Reg. No. 45,255

書類の送付先：

Douglas P. Mueller
MERCHANT & GOULD P.C.
3200 IDS Center, 80 South 8th Street,
Minneapolis, MN 55402-2215, U.S.A.

Send Correspondence to:

Douglas P. Mueller
MERCHANT & GOULD P.C.
3200 IDS Center, 80 South 8th Street,
Minneapolis, MN 55402-2215, U.S.A.

直通電話連絡先：(電話番号)

Douglas P. Mueller at 612/371-5237

Direct Telephone Calls to: (telephone number)

Douglas P. Mueller at 612/371-5237

Japanese Language Declaration

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor <u>Hiroaki Onishi</u> HW
同発明者の署名 日付	Inventor's signature Date <u>Hiroaki Onishi</u> July 24, 2001
住所	Residence c/o ROHM CO., LTD. <u>Kyoto</u> , Japan JPX
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto-shi, Kyoto 615-8585 Japan

第2の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any <u>Hisayoshi Fujimoto</u> 2W
同第2発明者の署名 日付	Second Inventor's signature Date <u>Hisayoshi Fujimoto</u> July 24, 2001
住所	Residence c/o ROHM CO., LTD. <u>Kyoto</u> , Japan JPX
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto-shi, Kyoto 615-8585 Japan

第3の共同発明者の氏名 (該当する場合)	Full name of third joint inventor, if any
同第3発明者の署名 日付	Third Inventor's signature Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

第4の共同発明者の氏名 (該当する場合)	Full name of fourth joint inventor, if any
同第4発明者の署名 日付	Fourth Inventor's signature Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

第5の共同発明者の氏名 (該当する場合)	Full name of fifth joint inventor, if any
同第5発明者の署名 日付	Fifth Inventor's signature Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address